


LED Tri-Proof IP69K

IK08 with PMMA Housing for rough environment



LED Tri-Proof IP69K

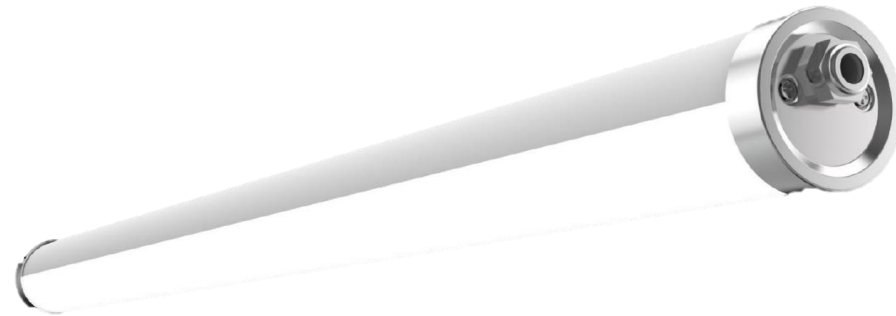

Technical Details

Voltage [V]	200-240V
Power [W]	50W
Lumen [lm]	6.500lm
Dimensions (mm)	1.450 x Ø76mm
Material:	PMMA frosted (UV-stabilized)
LEDs:	Samsung SMD2835
Protection:	IP69K / IK08 / IP68
Lifetime:	70.000h L80/B10
Beam Angle:	120°
Resistant against:	Ammoniak, Chemicals, UV-stabilized, Water pressure up to 90 bar
Ambient temperature:	-38°C up to +45°C
Warranty:	5 Years



LED Tri-Proof IP69K



Special Features:

- Venting via a pressure relief valve
- Fast Connector 3x1,5²
- Linkable (through wiring 3x1,5²)
- Stainless Steel End Caps & Mounting accessoires